




CONTACT : Pipecorr Pty Ltd, Bundoora, Australia
robertcox@pipecorr.com.au
 or +61 (0)39 467 2520, +61 (0) 413 201562

LIDA® Strip Anodes

LIDA® STRIP ANODES

THE LEADER IN MIXED METAL OXIDE ANODE TECHNOLOGY

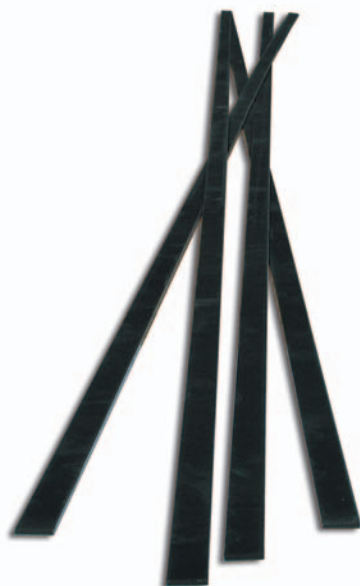

LIDA® Strip Anodes

LIDA® STRIP anodes give our customers advantages such as:

- tough base metal
ASTM 265 Titanium grade 1
- activation coating
LIDA STRIP consist of titanium strips coated with mixed metal oxides peculiar for soil

Ideal for single anode assemblies such as canistered anodes or shallow continuou Groundbeds

Electrical connection to all type of CP cables can be made with standard epoxy splice kit

LIDA® STRIP SPECIFICATIONS

Length	Size in mm		Current Output (Amps)	
	Width	Thickness	Soil With backfill	Soil Without backfill
1000	25	3	5	2,5
1000	20	3	4	2
750	25	3	3,75	1,87
750	20	3	3	1,5



www.denora.com

Durantes Vincunt

De Nora India Limited - Plot No. 184,185 & 189, Kundaim Industrial Estate - Kumdaim - 403 115, Goa, India
 ph +91 (0832) 981100 - fax +91 (0832) 3981101 - mail denoraindia@denora.com

All information, recommendations and suggestions appearing herein concerning the use of our products are based upon tests and data believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of the products described herein. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by De Nora as to the effects of such use or the results to be obtained, nor does De Nora assume any liability arising out of the use by others of the products referred to herein. In addition, the information herein is not to be construed as absolutely complete since additional information may be necessary or desirable when particular circumstances exist or because of applicable laws or government regulations. Nothing herein contained is to be construed as a recommendation to infringe any patent.