



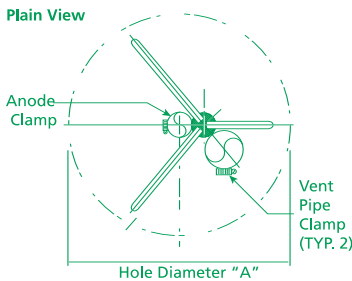

CONTACT : Pipecorr Pty Ltd, Bundoora, Australia
robertcox@pipecorr.com.au
 or +61 (0)39 467 2520, +61 (0) 413 201562

Ventralizer™

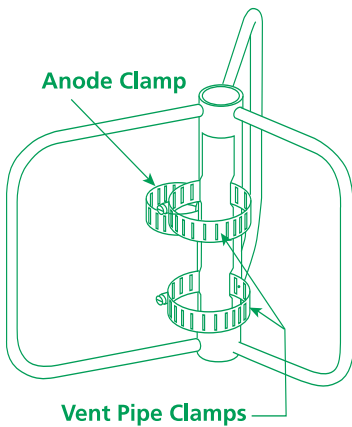

Dimensions:

Ventralizer™ Size	Actual Ventralizer™ OD	Recommended Hole Size
4"	3"	3 7/8" to 6"
6"	5"	5 7/8" to 8"
8"	7"	7 7/8" to 10"
10"	9"	9 7/8" to 12"
12"	11"	10 7/8" to 14"



www.denora.com

Industrie De Nora - Via Bistolfi, 35 - 20134 Milan, Italy - ph +39 02 21291 - fax +39 02 2129 2363 - mail info.products@denora.com

Get The Most Out Of Your Groundbed. Maximize Your Anode Current Output. Minimize Resistance.

The purpose of an impressed current anode in a groundbed is to electronically conduct current to the coke column. In order for this to work, it is critical that the anode be surrounded by wellcompacted carbonaceous backfill.

In the installation of LIDA® tubular anodes, a common practice is to "tape" the anodes to the vent pipe — feeding a single assembly down the hole. However, this can result in the anode being too close to the vent pipe to allow the backfill to fill around the entire anode surface during pumping operations. To make matters worse, the non-conductive vent pipe can serve to shield portions of the anode in contact with it, resulting in uneven current discharge of the anode.

To attach the LIDA® tubular anodes to the vent pipe, yet allow sufficient spacing between the node and vent pipe, engineers at De Nora have developed the Ventralizer™.

The Ventralizer's™ dual function is to centralize the anode in the hole, and at the same time, provide 1" of separation between the anode and the vent pipe.

BENEFITS

- Saves money by reducing installation time.
- Centers anode in groundbed hole.
- Maintains proper spacing between anode and non-conductive vent pipe.
- Increases anode lifetime by ensuring backfill coverage on total anode surface area.
- Solid, sturdy construction prevents bending or breakage during installation.
- Smooth, round surfaces guide anode and vent pipe down the hole.

INSTALLATION

- The vent pipe is secured to the Ventralizer™ with two hose clamps. The other clamp should be attached to the anode — only on the copper collars.
- A cordless drill or screwdriver quickly tightens clamps around both the vent pipe and the anode.
- The entire anode and vent pipe assembly can then be easily fed down the groundbed hole.
- On longer anodes, it is recommended that two Ventralizers™ be used — at the top and bottom of the anode.
- On double tail strings, or LIDA® One anodes, the cables from lower anodes should be taped to one of the Ventralizer arms to keep the cable away from the anode.

Durantes Vincunt

All information, recommendations and suggestions appearing herein concerning the use of our products are based upon tests and data believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of the products described herein. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by De Nora as to the effects of such use or the results to be obtained, nor does De Nora assume any liability arising out of the use by others of the products referred to herein. In addition, the information herein is not to be construed as absolutely complete since additional information may be necessary or desirable when particular circumstances exist or because of applicable laws or government regulations. Nothing herein contained is to be construed as a recommendation to infringe any patent.